

4MP Varifocal Lens Indoor Box Network Camera

Panasonic WV-U1142 captures the highest quality 4MP resolution images in even very challenging and dynamic environments. Intelligent Auto (iA) monitors scene dynamics and motion to adjust key camera settings automatically in real-time reducing distortion such as motion blur on moving objects. By adopting H.265 Smart Coding technology, bandwidth efficiency is intelligently increased for longer recording and less storage.

Extreme image quality allows evidence to be captured even under challenging conditions

- Auto Shutter speed control for fast moving objects
- Sharp and clear images of a walking person day & night
- Outstanding low light performance in true color with low noise for night time applications
- Super Dynamic 102dB for backlit situations involving headlights and shadows on night streets

Extreme bandwidth compression with Panasonic H.265 Smart Coding

- Longer recording and less storage compared to any H.264 based compression techniques
- Self-learning ROI* encoding (Auto VIQS) detects movement within the image and compresses the areas with little motion in order to reduce transmitted data while maintaining the quality of the image.

*Region of Interest

Key Features

- 4-megapixel images up to 30fps
- 2.5x built-in motorized zoom and motorized focus lens
- iA (intelligent Auto)
- Super Dynamic 102dB
- Color night vision (0.019 to 0.3 lx)
- H.265 Smart Coding
- Corridor mode
(90 degrees or 270 degrees in image rotation)
- Onvif Profile G / T

Industry examples

- Retail
- Education
- Public safety
- Bank / Hospital / Building




Specifications

Camera	Image Sensor	Approx. 1/2.7 type CMOS image sensor					
	Minimum Illumination	Color : 0.3 lx, BW: 0.12 lx (50IRE, F2.0, Maximum shutter: Off (1/30s), AGC: 11) Color : 0.019 lx, BW: 0.0075 lx (50IRE, F2.0, Maximum shutter: max. 16/30s, AGC: 11) ¹					
	White Balance	AWC (2,000 - 10,000 K), ATW1 (2,700 - 6,000 K), ATW2 (2,000 - 6,000 K)					
	Maximum shutter	Max. 1/10000 s to Max. 16/30 s					
	Intelligent Auto	On / Off					
	Super Dynamic	On / Off, The level can be set in the range of 0 to 31.					
	Dynamic Range	Max. 102 dB (Super Dynamic: On, Level: 31)					
	Adaptive Black Stretch	—					
	Back light compensation / High light compensation	BLC (Back light compensation) / HLC (High light compensation) / Off (only when Super dynamic / Intelligent Auto: Off)					
	Fog compensation	On / Off (only when Intelligent auto / auto contrast adjust: Off)					
	Maximum gain (AGC)	The level can be set in the range of 0 to 11.					
	Color/BW (ICR)	Off / On / Auto1 (Normal) / Auto2 (IR Light) / Auto3 (SCC)					
	Digital Noise Reduction	The level can be set in the range of 0 to 255.					
	Video Motion Detection (VMD)	On / Off, 4 areas available					
	Scene Change Detection(SCD)	On / Off, 1 areas available					
Privacy Zone	On / Off, Up to 8 zones available						
Image rotation ²	0° (Off) / 90° / 180° (Upside-down) / 270°						
Camera Title (OSD)	On / Off, Up to 20 characters (alphanumeric characters, marks)						
Lens	Focal length	2.9 mm – 7.3 mm (1/8inches-9/32inches)					
	Zoom ratio	2.5x Optical zoom (Motorized zoom / Motorized focus) 3.3x FHD Extra Optical Zoom (when resolution is 1920x1080)					
	Digital (electronic) zoom	Choose from 3 levels of x1, x2, x4					
	Angular Field of View	[16 : 9 mode] [4:3 mode] is not supported. Horizontal : 44° (TELE) – 103° (WIDE), Vertical : 25° (TELE) – 57° (WIDE)					
	Maximum Aperture Ratio	1 : 2.0 (WIDE) – 1 : 3.0 (TELE)					
Focusing Range	1 m {39-3/8 inches} – ∞						
Browser GUI	Camera Control	Brightness					
	GUI / Setup Menu Language	English, Italian, French, German, Spanish, Portuguese, Russian, Chinese, Japanese					
Network	Network IF	10Base-T / 100Base-TX, RJ45 connector					
	Resolution	[16 : 9 mode] [4:3 mode] is not supported. 2560x1440, 1920x1080, 640x360, 320x180					
	H.265	Constant bit rate / VBR / Frame rate / Best effort					
	H.265	Transmission Mode	Unicast / Multicast				
		Transmission Type					
	H.265	Max. frame rate for each stream	Stream(1)	Stream(2)	Stream(3)	JPEG(1)	JPEG(2)
			Single-stream	30fps	Off	Off	3fps
H.265	Image Quality	Multi-stream	15fps	15fps	15fps	3fps	3fps
		JPEG	10 steps				
Smart Coding	Image Quality	GOP(Group of pictures) control: On(Frame rate control)/ On(Advanced)/ On(Mid./ On(Low)/ Off					
		AUTO VIQS: On/ Off					
Audio Compression	—						
Audio transmission mode	—						

Network	Supported Protocol	IPv6 : TCP/IP, UDP/IP, HTTP, HTTPS, RTP, SMTP, DNS, NTP, SNMP, DHCPv6, MLD, ICMP, ARP, IEEE 802.1X, DiffServ IPv4 : TCP/IP, UDP/IP, HTTP, HTTPS, RTSP, RTP, RTSP/RTCP, SMTP, DHCP, DNS, DDNS, NTP, SNMP, UPnP, IGMP, ICMP, ARP, IEEE 802.1X, DiffServ
	No. of Simultaneous Users	Up to 14 users (Depends on network conditions)
	SDXC/SDHC/SD Memory Card (Option)	H.265 recording: Manual REC / Alarm REC (Pre/Post) / Schedule REC / Backup upon network failure Compatible microSDXC/microSDHC Memory Card: Panasonic 32 GB*, 64 GB**model *microSDXC card, **microSDHC card
Mobile Terminal Compatibility	iPad, iPhone, Android™ terminals	
ONVIF Profile	G / T	
Alarm	Alarm Source	VMD alarm, SCD alarm, Command alarm
	Alarm Actions	SDXC/SDHC/SD memory recording, E-mail notification, HTTP alarm notification Indication on browser, Panasonic alarm protocol output
Input/ Output	Monitor Output(for adjustment)	—
	Audio input	—
	Audio Output	—
General	External I/O Terminals	—
	Safety	UL (UL60950-1), c-UL (CSA C22.2 No.60950-1), CE, IEC60950-1
	EMC	FCC (Part15 ClassA), ICES003 ClassA, EN55032 ClassB, EN55024
Power Source and Power Consumption	PoE (IEEE802.3af compliant) Device : DC48 V 100 mA, Approx. 4.8 W (Class 2 device)	
Ambient Operating Temperature	-10 °C to +50 °C (+14 °F to +122 °F) {Power On range: 0 °C to +50 °C (+32°F to +122 °F)}	
Ambient Operating Humidity	10 to 90 % (no condensation)	
Dimensions	59 mm (W) x 49 mm (H) x 116 mm (D) *Installing using the base bracket {2-5/16 inches (W) x 1-15/16 inches (H) x 4-9/16 inches (D)} (excluding side cover)	
Mass (approx.)	200 g {0.44 lbs.}	
Finish	Main body : PC / ABS resin, i-PRO white	

¹ Converted value
² When "4:3(30fps mode)" or "4:3(25fps mode)" is selected for "Image capture mode", "90 °" and "270 °" cannot be selected.

Appearance

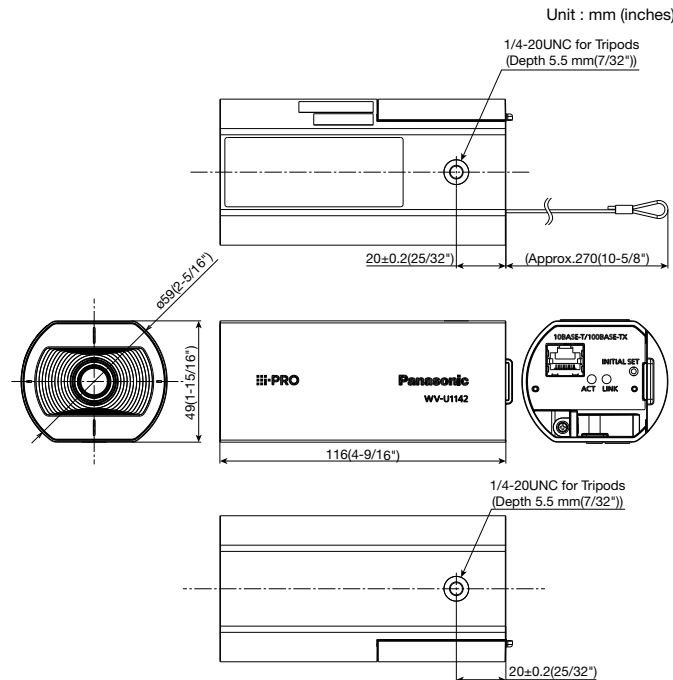

Trademarks and registered trademarks

- iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries.
- Android is a trademark of Google LLC.
- ONVIF is trademarks or registered trademarks of Onvif Inc.
- All other trademarks identified herein are the property of their respective owners.

Important

- Safety Precaution : Carefully read the Basic Information, Installation Guide and Operating Instructions before using this product.
- Panasonic cannot be responsible for the performance of the network and/or other manufacturers' products used on the network.

• Masses and dimensions are approximate. • Specifications are subject to change without notice.



Panasonic Corporation

Panasonic i-PRO Sensing Solutions Co., Ltd.

<https://ipro.panasonic.com>

<https://security.panasonic.com>

<https://www.linkedin.com/company/i-pro-sensing-solutions-co-ltd/>