


4K Entry Displays with High Picture Quality Enhance Presentation Effect.

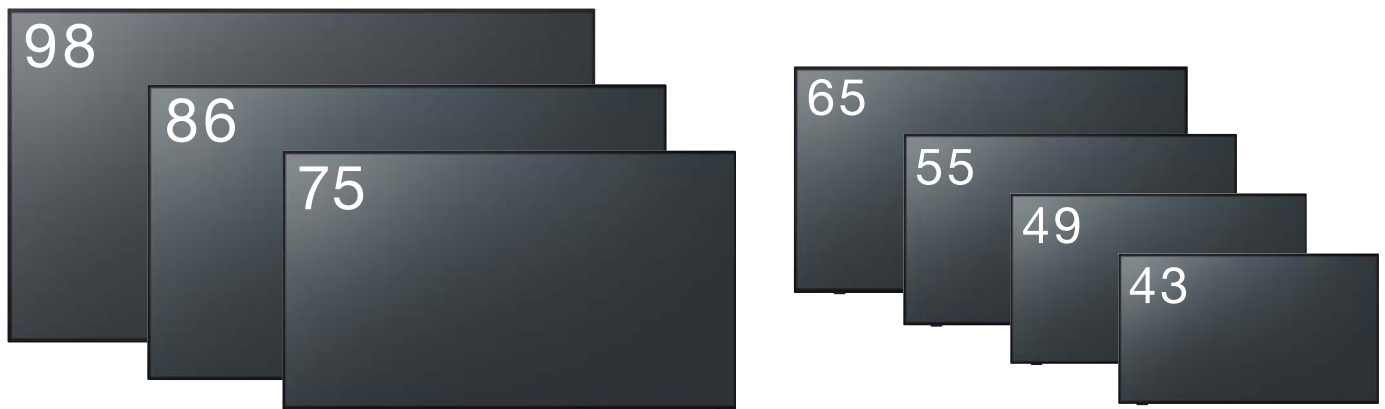

CQE1 Series							
	TH-98CQE1W	TH-86CQE1W	TH-75CQE1W	TH-65CQE1W	TH-55CQE1W	TH-49CQE1W	TH-43CQE1W
Screen Size	98-inch class	86-inch class	75-inch class	65-inch class	55-inch class	49-inch class	43-inch class
Brightness	400 cd/m ²						
Contrast	TBD						
Resolution	4K (3840 x 2160)						

- **High Picture Quality**

Highly detailed images in 4K resolution (3840×2160) supporting 4K/60p signals for faithful expression of high-quality content.

- **Excellent Reliability**

Enables continuous operation 16 hours a day, without any concern. Ideal everyday use for offices, schools, and other applications.

- **Various Types of Operation**

Supports 4 HDMI input terminals for high-frequency use, and other basic terminals are also provided as standard equipment.

Specifications (Tentative) **Design and specification subject to change without notice.*

Model	TH-98CQE1W	TH-86CQE1W	TH-75CQE1W	TH-65CQE1W	TH-55CQE1W	TH-49CQE1W	TH-43CQE1W	
Display Panel	Panel size	98-inch class	86-inch class	75-inch class	65-inch class	55-inch class	49-inch class	43-inch class
	Panel type / Backlight	TBD						
	Aspect ratio	16:9						
	Effective display area (W x H)	TBD	TBD	TBD	TBD	TBD	TBD	TBD
	Resolution	3840 x 2160						
	Brightness (typ.)	400 cd/m ²						
	Contrast ratio (typ.)	TBD						
	Response time (typ.)	TBD						
	Viewing angle [(T/B)/(L/R)]	TBD						
	Panel Surface Treatment	TBD						
Terminals	HDMI In	HDMI TYPE-A Connector x 4						
	PC In	Mini D-sub 15-pin x 1 (Female)						
	Serial	D-sub 9-pin x 1, RS232C Compatible						
	IR In	Stereo Mini Jack (M3) x 1						
	Audio in	Pin Jack (L/R) x 1 (TBD)						
	Audio out	Stereo Mini Jack (M3) x 1, SPDIFx1						
	LAN	RJ 45 x 1						
	USB	USB Connector TYPE-Ax1, Type-C x 1						
Wifi	x 1							
Built-in speaker	24 W [12 W + 12 W]			16 W [8 W + 8 W]				
Power requirements	220-240 V AC, 50/60 Hz							
Power consumption	TBD	TBD	TBD	TBD	TBD	TBD	TBD	
Power off condition	TBD	TBD	TBD	TBD	TBD	TBD	TBD	
Standby condition	TBD	TBD	TBD	TBD	TBD	TBD	TBD	
Dimensions (W x H x D)	2236 x 1292 x 98 mm (TBD)	1928 x 1099 x 80 mm (TBD)	1684 x 967 x 100 mm (TBD)	1459 x 853 x 75 mm (TBD)	1238 x 712 x 87 mm (TBD)	1102 x 635 x 85 mm (TBD)	966 x 557 x 86 mm (TBD)	
Weight	102.3 kg (TBD)	65.8 kg (TBD)	37.2kg (TBD)	24.5 kg (TBD)	17.1 kg (TBD)	13.7 kg (TBD)	10.3 kg (TBD)	
Bezel width	39 mm (T/B/L/R)	15 mm (T/B/L/R)	16 mm (T/R/L), 21 mm (B)	15 mm (T/R/L), 21 mm (B)	11 mm (T/R/L), 14 mm (B)	11 mm (T/R/L), 15 mm (B)	9 mm (T), 10 mm (R/L), 13 mm (B)	
Wall-hanging pitch	900 x 600 mm, M8	600 x 400 mm, M8		400 x 400 mm, M6	400 x 200 mm, M6	200 x 200 mm, M6		
Orientation	Landscape							
Tilting Angle	0-20 degree forward (TBD)							
Operating time	16 h/day							
Operating environment	Temperature: 0 °C to 40 °C (32 °F to 104 °F)/Humidity: 20-80 % (Non condensation)/for up to 0-1400 m (4593 ft) altitude. Temperature: 0 °C to 35 °C (32 °F to 95 °F)/Altitude 1400 -2800 m (4593 ft to 7874 ft)							

Panasonic[®]

Weights and dimensions shown are approximate. Specifications and appearance are subject to change without notice. Product availability may vary on region and country. This product may be subject to export control regulations. Trademark PULink is a trademark applied for trademark rights in Japan, the United States of America and other countries and areas. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. All other trademarks are the property of their respective trademark owners. © 2020 Panasonic Corporation. All rights reserved.



For more information about Panasonic Professional Displays, please visit:
Display Global Website – panasonic.net/cns/prodisplays
YouTube – www.youtube.com/user/PanasonicProDisplay

All information included here is valid as of February 2020.

CQE1WPRE1 Printed in Japan.