


Versatile Lineup of 4K High-resolution Displays Support 24-hour Operation

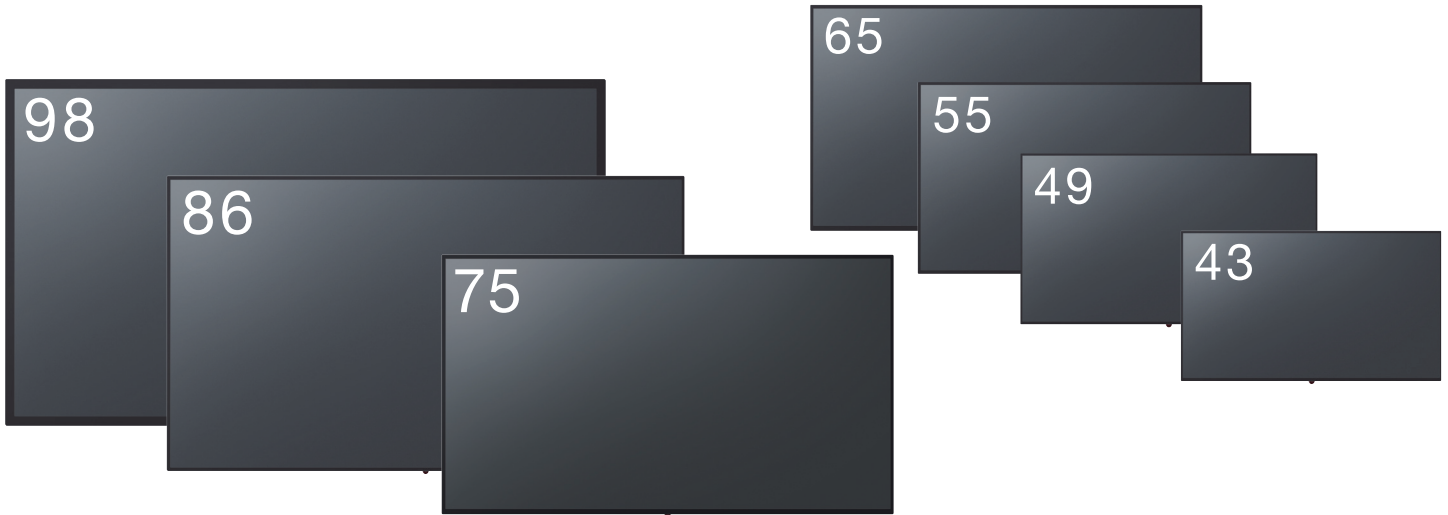

SQE1 Series							
	TH-98SQE1	TH-86SQE1	TH-75SQE1	TH-65SQE1	TH-55SQE1	TH-49SQE1	TH-43SQE1
Screen Size	98-inch class	86-inch class	75-inch class	65-inch class	55-inch class	49-inch class	43-inch class
Brightness	500 cd/m ²						
Contrast	TBD	1200:1					
Resolution	4K (3840 x 2160)						

• High Picture Quality

Four times higher resolution quality than Full HD has been achieved to display 4K/60p video that expresses images in detail.

• Easy Installation

Compatible with a wide range of applications, for a design that blends into spaces. Supports portrait installation, and 24/7 continuous operation. Ideal for installation in public spaces.

• Wide Expandability

A slot with Intel® SDM (Smart Display Module) specifications has been adopted. Equipped with 4 HDMI/USB Type-C input terminals support HDMI CEC. Also correspond to Crestron Connected™.

Specifications (Tentative) * Design and specification subject to change without notice.

Model	TH-98SQE1	TH-86SQE1	TH-75SQE1	TH-65SQE1	TH-55SQE1	TH-49SQE1	TH-43SQE1	
Display Panel	Panel size	98-inch class (2476.9 mm)	86-inch class (2174.2 mm)	75-inch class (1892.7 mm)	65-inch class (1638.9 mm)	55-inch class (1387.8 mm)	49-inch class (1232.0 mm)	43-inch class (1079.8 mm)
	Panel type / Backlight	IPS/ (TBD)	IPS/E-LED	IPS/D-LED				
	Aspect ratio	16:9						
	Effective display area (W x H)	2158.8 x 1214.3 mm (84.99" x 47.80")	1895.0 x 1065.9 mm (74.60" x 41.96")	1649.6 x 927.9 mm (64.94" x 36.53")	1428.4 x 803.5 mm (56.23" x 31.63")	1209.6 x 680.4 mm (47.62" x 26.78")	1073.8 x 604.0 mm (42.47" x 23.77")	941.1 x 529.4 mm (37.05" x 20.84")
	Resolution	3840 x 2160						
	Brightness (typ.)	500 cd/m ²						
	Contrast ratio (typ.)	TBD		1200:1				
	Response time (typ.)	TBD		8.0 ms (G to G)				
	Viewing angle [(T/B)/(L/R)]	178° / 178° (CR>10)						
	Panel Surface Treatment	Anti-glare type (Haze 25 %)	Anti-glare low reflection type (Haze 3 %)		Anti-glare type (Haze 1 %)			
Terminals	HDMI In	HDMI TYPE-A Connector x 4						
	DisplayPort In	DisplayPort x 1						
	DisplayPort Out	DisplayPort x 1						
	PC In	Mini D-sub 15-pin x 1						
	Serial	D-sub 9-pin x 1, RS232C Compatible						
	IR In	Stereo Mini Jack (M3) x 1						
	Audio In	Pin Jack (L/R) x 1 (TBD)						
	Audio Out	Stereo Mini Jack(M3) x1 SPDIF x 1						
	LAN	RJ45 x 1						
	Slot	Intel® SDM specification						
	USB	USB Connector Type-A x 2, Type-C x 1 (Internal) Type-A x 1						
WiFi	Dongle		Built-in					
Built-in speaker	24 W [12 W + 12 W]			16 W [8 W + 8 W]				
Power requirements	110–127 V AC, 50/60 Hz, 220–240 V AC, 50/60 Hz							
Power consumption	TBD	TBD	TBD	TBD	TBD	TBD	TBD	
Power off condition	TBD	TBD	TBD	TBD	TBD	TBD	TBD	
Standby condition	Approx. 0.5 W							
Dimensions (W × H × D) (TBD) Excluding remote control receiver	2237 x 1292 x 107 mm (88.04" x 50.85" x 4.21") (TBD)	1929 x 1100 x 81 mm (75.91" x 43.28" x 3.16") (TBD)	1684 x 968 x 100 mm (66.28" x 38.09" x 3.92") (TBD)	1460 x 842 x 96 mm (57.46" x 33.12" x 3.77") (TBD)	1239 x 712 x 104 mm (48.75" x 28.02" x 4.09") (TBD)	1102 x 635 x 105 mm (43.37" x 24.98" x 4.11") (TBD)	966 x 558 x 106 mm (38.01" x 21.94" x 4.17") (TBD)	
Weight (TBD)	102.3 kg	62.7 kg	37.2 kg	24.5 kg	17.1 kg	13.7 kg	10.3 kg	
Bezel width	37.9 mm (1.49") (T/R/L/B) (TBD)	15.3 mm (0.6") (T/R/L/B) (TBD)	15.7 mm (0.62") (T/R/L), 21.5 mm (0.85") (B) (TBD)	14.7 mm (0.58") (T/R/L), 21.4 mm (0.84") (B) (TBD)	12.3 mm (0.48") (T/R/L), 15.1 mm (0.59") (B) (TBD)	11 mm (0.43") (T/R/L), 14.4 mm (0.57") (B) (TBD)	9.6 mm (0.38") (T/R/L), 13.2 mm (0.52") (B) (TBD)	
Wall-hanging pitch	VESA Compliant 900 x 600 mm (35.4" x 23.6") M8	VESA Compliant 600 x 400 mm (23.6" x 15.8") M8	VESA Compliant 400 x 400 mm (15.8" x 15.8") M6		VESA Compliant 400 x 200 mm (15.8" x 7.9") M6	VESA Compliant 200 x 200 mm (7.9" x 7.9") M6		
Orientation	Landscape/Portrait							
Tilting angle	Landscape setting: 0 - 20 degrees forward, Portrait setting: 0 - 20 degrees forward (TBD)							
Operating time	24 h/day							
Operating environment	Temperature: 0 °C to 40 °C (32 °F to 104 °F)/Humidity: 20-80 % (Non condensation)/for up to 0-1400 m (4593 ft) altitude. Temperature: 0 °C to 35 °C (32 °F to 95 °F)/Altitude 1400 -2800 m (4593 ft to 7874 ft)							

Optional Accessories

(TBD)

Software

(TBD)

Panasonic®

Weights and dimensions shown are approximate. Specifications and appearance are subject to change without notice. Product availability may vary on region and country. This product may be subject to export control regulations. Trademark P-Link is a trademark applied for trademark rights in Japan, the United States of America and other countries and areas. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. Intel® is registered trademark or trademark of Intel Corporation, registered in the U.S. and other countries and regions. All other trademarks are the property of their respective trademark owners. © 2020 Panasonic Corporation. All rights reserved.



For more information about Panasonic Professional Displays, please visit:

Display Global Website – panasonic.net/cns/prodisplays
YouTube – www.youtube.com/user/PanasonicProDisplay

All information included here is valid as of May 2020.

SQE1PRE2 Printed in Japan.