

New functions and addendum

- This document contains descriptions of how to set the new functions and their restrictions. It is recommended to read them while referring to the Operating Instructions provided with this product together.
- Depending on the model used, the screens shown in the explanations may differ to the actual camera screens.
- The model number is abbreviated in some descriptions in this manual.
- This document is for the following models.
WV-X8570N, WV-S8530N


Due to software upgrade, the following functions have been added and changed to this product.

- **Firmware Ver.4.00**

No.	Functions	Item (Page)	Page
1	Improvement of readability of Date/time and characters on screen.	Basic (Basic)	2
2	Change in encryption of the settings.	Data(Maintenance)	3

1. Improvement of readability of Date/time and characters on screen (Operating Instructions Configure the basic settings of the camera [Basic]- Configure the basic settings [Basic])

[100%*] was added to [OSD] - [Character size] in order to improve readability.

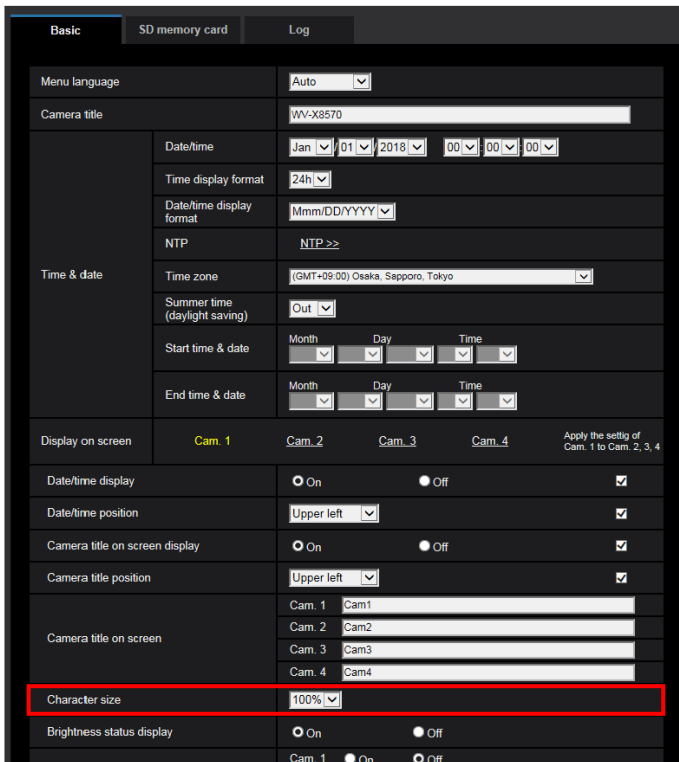

[OSD] - [Character size]

Select the character size of the date and time as well as text displayed in the image.

- **100%*** : Character size is displayed at 150% for resolutions less than VGA. Characters are displayed with standard size for resolutions larger than VGA.
- **100%**: Displays in the standard size.
- **150%**: Displays in 150% of the standard size.
- **200%**: Displays in 200% of the standard size.
- **Default:** 100%*

IMPORTANT

- If the settings for [Date/time position] and [Camera title position] are different, the frame rate may be lower than the specified value.
- If the settings for [Date/time position] and [Camera title position] are different, characters may be displayed incorrectly or overlapped depending on the [Character size] setting and the number of characters used. After completing the settings, confirm the result on the “Live” page.
- If “150%” or “200%” is selected for [Character size], the frame rate may be lower than the specified value.
- Depending on the setting and the numbers of characters used for [Character size], and the setting and image capture size of images for [Image rotation], characters displayed on the screen may be cut off. After completing the settings, confirm the result on the “Live” page.

Note

- If “Overlay” is “On”, “Character size” cannot be set to “150%” or “200%”.

2. Change in encryption of the settings.

(Operating Instructions Maintenance of the camera [Maintenance] - Settings data/backing up or restoring logs [Data])

The screenshot shows a web interface with a dark theme. At the top, there are navigation tabs: 'System log', 'Upgrade', 'Status', 'Default reset', and 'Data'. The 'Data' tab is selected. Below the tabs, there are two main sections: 'Backup' and 'Restore'. In the 'Backup' section, there are three rows: 'Setup data' with an 'Execute' button, 'Scene file' with an 'Execute' button, and 'Logs' with an 'Execute' button. In the 'Restore' section, there are two rows. The first row is for 'Setup data', which includes a 'Browse...' button, two radio button options: 'Restore all settings.' (selected) and 'Restore all settings except the network settings.', and an 'Execute' button. The second row is for 'Scene file', which includes a 'Browse...' button and an 'Execute' button. At the bottom of the interface, there is a message box that reads: 'It will take around 2 minutes to complete restoring data. Please wait and do not operate the browser during this process.'

Backup

[Setup data]

Click the [Execute] button to backup the setup data of the camera to a PC.

Note

- Encryption of the settings has been changed after this version. Therefore, if you revert the software to the previous version, the settings cannot be restored.